INSTRUKCJA MONTAŻU – ZESTAW HIGIENICZNY BESCO

VEO / ZEA / DECCO / ILLUSION II

UWAGA! Przed montażem baterii należy dokładnie przeczytać niniejszą instrukcję oraz wszystkie ostrzeżenia i zalecenia eksploatacyjne, zawarte w dołączonej karcie gwarancyjnej. Niewłaściwy montaż może doprowadzić do uszkodzenia baterii i skutkuje utratą ochrony gwarancyjnej na produkt!

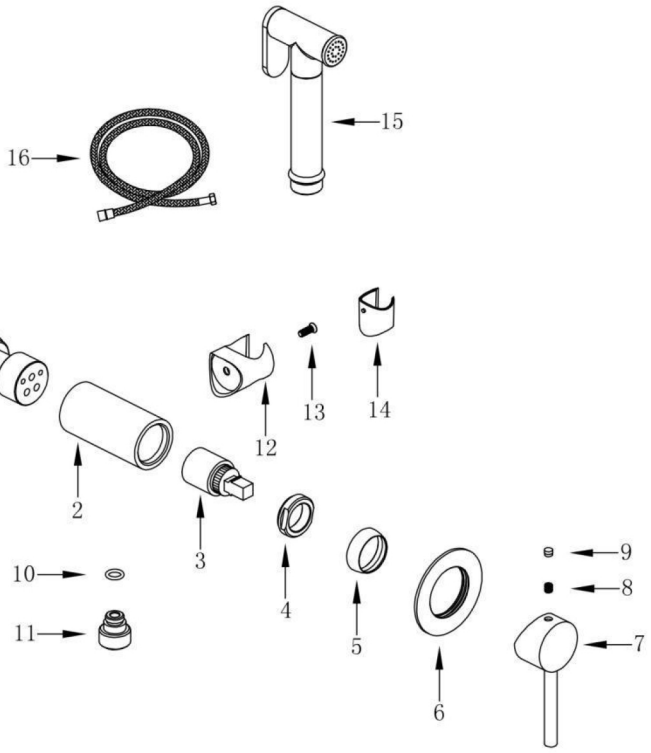

Schemat wymiarów[mm/cale]:

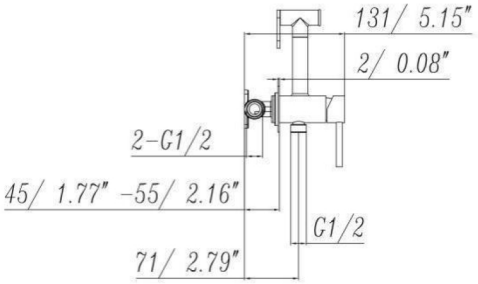

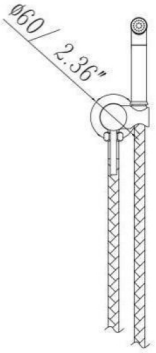

OGÓLNE INFORMACJE I ZALECENIA MONTAŻOWO – EKSPLOATACYJNE:

1. Przed rozpoczęciem montażu baterii, należy sprawdzić kompletność i zgodność produktu z zamówieniem. W przypadku stwierdzenia jakichkolwiek braków, wad czy uszkodzeń (np. transportowych) baterii, nie należy jej montować.
2. Użytkowanie baterii powinno odbywać się zgodnie z jej przeznaczeniem. Baterie Besco przeznaczone są wyłącznie do użytku domowego. Wszelkie inne użycie uważa się za niewłaściwe. Nie należy stosować baterii komercyjnie.
3. Nie stosować w pomieszczeniach, w których temperatura powietrza spada poniżej 4°C.
4. Przed montażem baterii, należy odpowiednio przepłukać instalację wodną, by uniknąć ewentualnych zanieczyszczeń elementów baterii np. osadem, drobinkami kamienia czy rdzy, które mogą prowadzić do ich uszkodzenia.
5. Podczas montażu baterii, należy bezwzględnie zapewnić łatwy dostęp do części użytkowych oraz ulegających naturalnemu zużyciu tj. głowice, przełączniki, wężyki przyłączeniowe, itp.
6. Baterie ze szczególnym uwzględnieniem elementów tj. aerator, itd. należy regularnie czyścić czystą wodą lub łagodnymi środkami myjącymi i osuszać miękką ściereczką, by nie dopuścić do osadzania kamienia. Nie stosować środków żrących, ścierających oraz zawierających cząsteczki mogące uszkodzić powierzchnię baterii, tj. takich, które nie są przeznaczone do tego typu produktów.
7. Do montażu baterii używać kluczy z gładkimi i nie zaciskającymi się powierzchniami szczęk, by nie uszkodzić jej elementów.

MONTAŻ BATERII:

1. Wykonaj w ścianie otwór o wysokości min. 50 mm, szerokości min. 50 mm oraz głębokości 68–82 mm.
UWAGA! Zakres głębokości obejmuje już grubość płytek ściennych. Przy ustalaniu głębokości otworu należy koniecznie uwzględnić grubość kafelek, jakie zostaną położone na ścianie

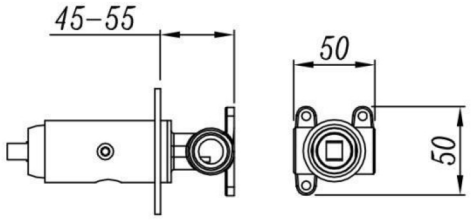

2. Zaznacz na ścianie miejsca na śruby i wywierć otwory wiertarką udarową (uwaga: użyj wiertła o rozmiarze 6 mm). Wbij kołki rozporowe w ścianę. Poprawnie podłącz korpus baterii do przyłączy ciepłej i zimnej wody, a następnie dokręć śruby.
UWAGA! Przed ostatecznym zamocowaniem korpusu w otworze należy sprawdzić szczelność połączeń.

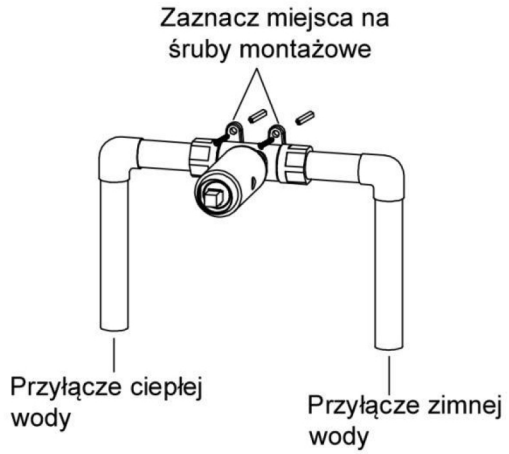

3. Użyj klucza imbusowego 6 mm, aby odkręcić przyłącze ścienne od korpusu baterii.



4. Zgodnie z rysunkiem, otwór wycinany w płytce powinien mieć średnicę 48 mm.

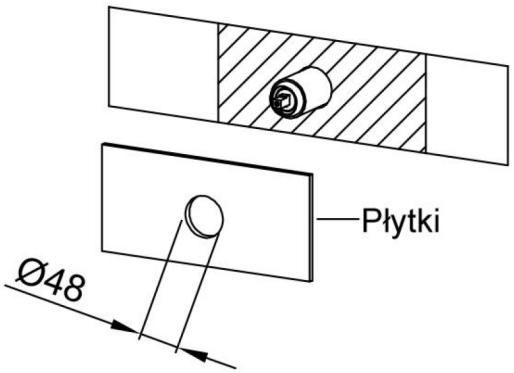

5. Po ułożeniu płytek nałóż rozetę na korpus baterii tak, aby zakryła otwór w ścianie.

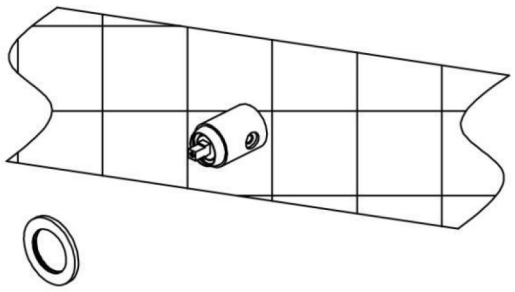

6. Wkręć przyłącze ścienne z powrotem do korpusu baterii.



7. Użyj śrubokręta krzyżakowego, aby zamontować uchwyt prysznicowy do korpusu baterii, a następnie załóż plastikową osłonkę ochronną.

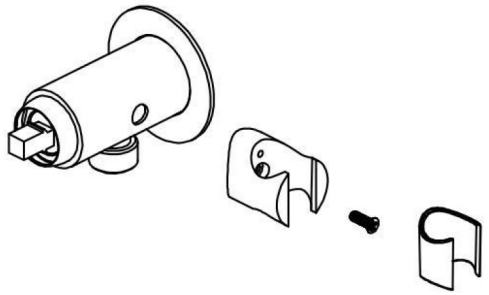

8. Nałóż uchwyt na korpus baterii, dokręć śrubę i na koniec załóż zaślepkę dekoracyjną.

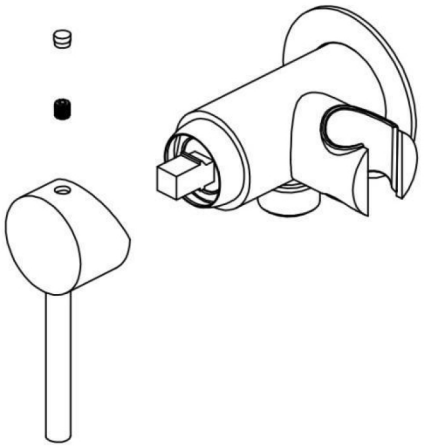

9. Podłącz jeden koniec węża prysznicowego do bidetki (pistoletu), a drugi do przyłącza ściennego. Następnie umieść bidetkę w uchwycie prysznicowym.

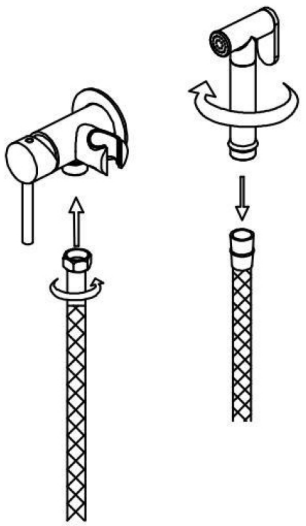

10. Instalacja zakończona (zgodnie z rysunkiem).

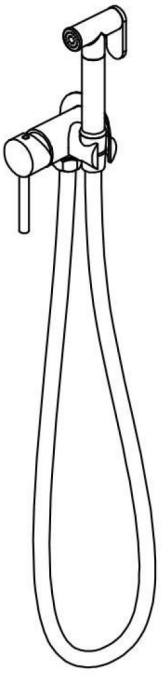

UWAGA! Montaż baterii bidetowej należy powierzyć wyłącznie wyspecjalizowanemu wykonawcy. Montaż baterii przez nieupoważnione do tego osoby może skutkować uszkodzeniem produktu oraz innych elementów wyposażenia jak bidet, podłoga, itp.

Besco Sp. z o.o.
38-524 Besko, Kościelna 21
Poland

Tel.+48 600 700 336
www.besco.eu
info@besco.eu

INSTALLATION MANUAL — BESCO HYGIENE BIDET SET

VEO / ZEA / DECCO / ILLUSION II

CAUTION! Before installing the bidet faucet, please read this manual and all warnings and recommendations regarding use included in the attached warranty card carefully.Incorrect installation may damage the components of the faucet and will result in the loss of warranty coverage for the product!

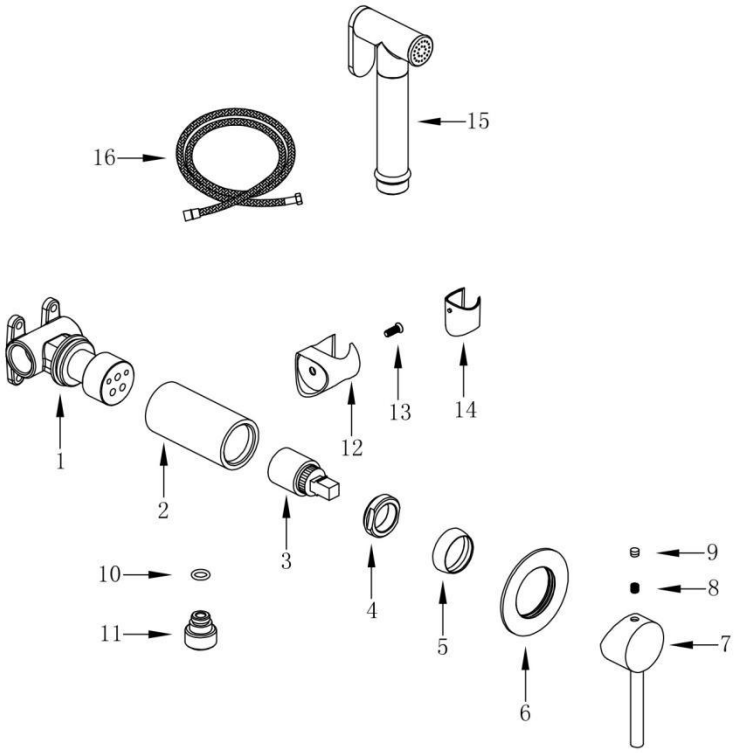

Dimensions scheme [mm/inches]:

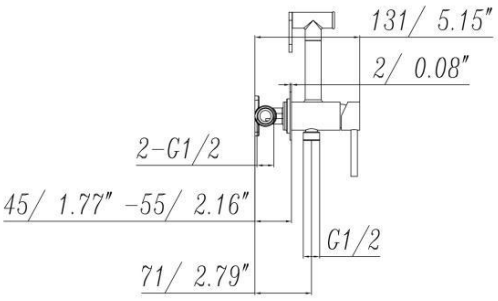

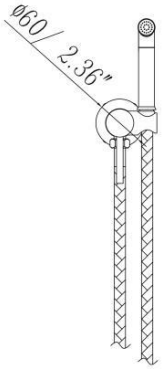

GENERAL INFORMATION AND RECOMMENDATIONS REGARDING USE & INSTALLATION:

1. Before installation of the b idet faucet, check the completeness and compliance of the product with the order. In the event of any deficiencies, defects or damages (e.g. caused by transport) to the faucet, it should not be installed.
2. The bidet faucet should be used in accordance with its intended purpose. Besco faucets are intended for domestic use only. Any other use is considered improper. The bidet faucet should not be used commercially.
3. Do not use in rooms where the air temperature drops below 4°C.
4. Before installing the faucet, flush the water system properly to avoid any contamination of the faucet components, e.g. with sediment, limescale or rust particles, which may lead to their damage.
5. When installing the faucet, it is absolutely necessary to secure easy access to the parts that wear out during normal use of the product, e.g. cartridges, switches, connection hoses, etc.
6. Faucets, especially all components such as aerator, etc. should be cleaned on a regular basis, with clean water or mild cleaning agents and then dried with a soft cloth to prevent limescale. Do not use caustic, abrasive or particles containing substances that may damage the faucet surface, i.e. those that are not intended for this type of product.
7. To assemble the bidet faucet use only keys with smooth and non-clamping jaw surfaces to avoid damaging faucet components.

FAUCET INSTALLATION:

1. Make a hole in the wall with a min.height 50 mm,min. width 50 mm and depth 68-82 mm .CAUTION!The depth range includes the thickness of the tiles used on the wall.When determining the depth of the hole,it is necessary to take into account what thickness of tiles will be laid on the selected wall.

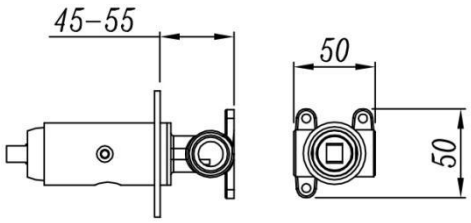

2. Markthe position of the screw hole on the wall, drill a hole with an impact drill (note: use a 6MM electric drill bit), drive the expansion rubber particles into the wall, then tighten the screws, correctly connect the cold and hot water inlet, and after testing the water and confirming that there is no leakage, cover the pipeline and main body.

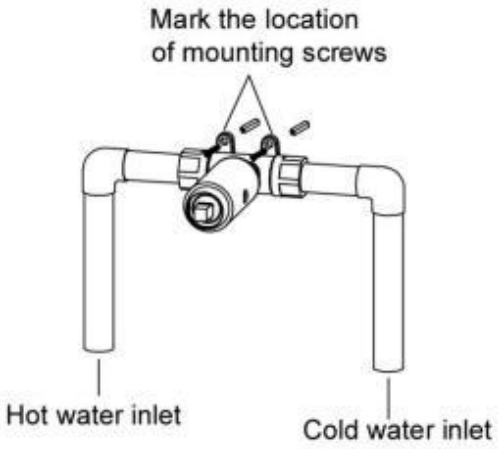

3. Use a 6mm hex key to unscrew the wall supply connector from the main body.



4. Asshown in the figure, when preparing to drill the tile, the hole diameter is 48mm.

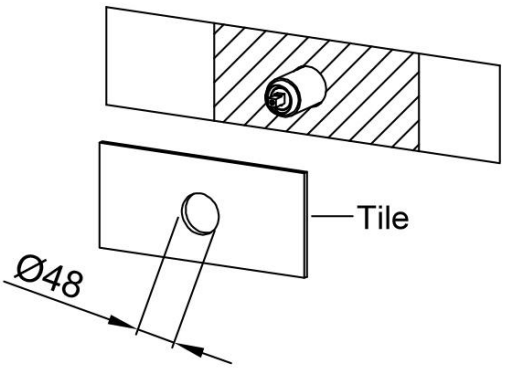

5. After laying the tiles, insert the cover through the main body and envelops the hole.

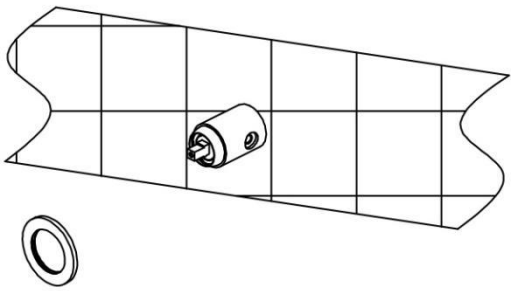

6. Screw the wall supply connector to the main body.



7. Use a cross screwdriver to install the shower holder to the main body, insert the plastic protective cover.

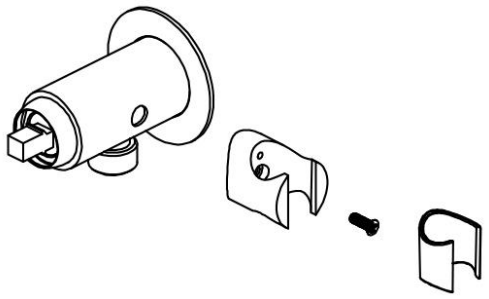

8.Insert the handle into the main body , tighten the screw and finally put on the decorative button.

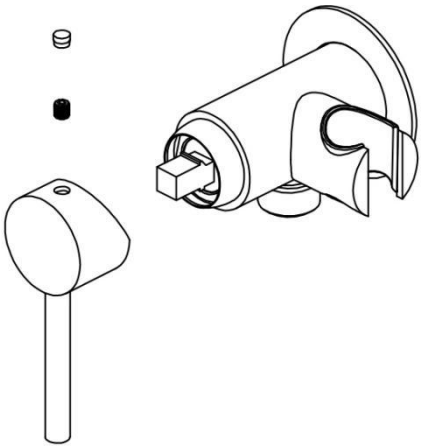

9.One end of the shower hose is connected to the spray gun, and the other end is connected to the water supply connector. The spray gun is inserted into the shower holder.

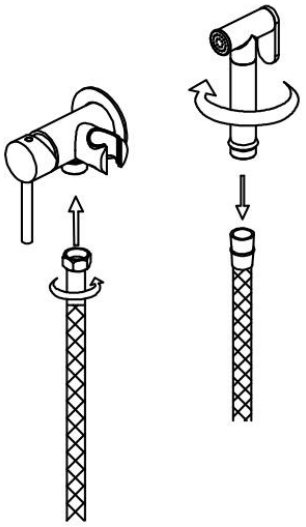

10. As shown in the figure ,installation is completed.

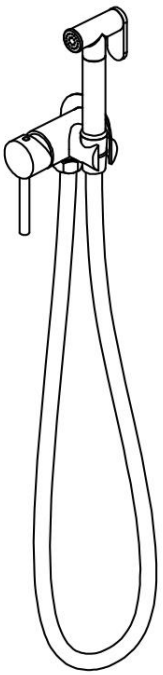

CAUTION! The installation of the bidet faucet should only be carried out by a specialized contractor. Installation of the bidet faucet by unauthorized persons may result in damage to the product or other bathroom equipment such as bidet, floor, etc.

Besco Sp. z o.o.
38-524 Besko, Kościelna 21
Poland

Tel.+48 600 700 336

www.besco.eu
info@besco.eu