

PEX-AL „T” kus redukovaný

Art: 53215

Materiál:


1. tělo:	CW617N - 4MS
2. „o” kroužek:	NBR
3. sedlo:	plast
4. objímka:	nerez
typ lisovacích čelistí:	TH
max. pracovní teplota:	80°C
max. pracovní tlak:	16 bar
použití:	voda



4 3 2 1

Technický výkres

rozměr mm	D	D1	D2	L1	L2	H	Váha g	EAN
16x20x16	16	20	16	42,5	42,5	40,5	90	8595042203479
20x16x16	20	16	16	40,5	40,5	42,5	93	8595042203493
20x16x20	20	16	20	40,5	40,5	42,5	95	8595042203509
20x20x16	20	20	16	42,5	42,5	42,5	102	8595042217889
20x26x16	20	26	16	45,5	45,5	42,5	117	8595042217902
20x26x20	20	26	20	45,5	45,5	42,5	133	8595042208887
26x16x16	26	16	16	40,5	40,5	45,5	115	8595042208894
26x16x20	26	16	20	40,5	40,5	45,5	123	8595042204988
26x16x26	26	16	26	40,5	40,5	45,5	136	8595042204926
26x20x16	26	20	16	42,5	42,5	45,5	129	8595042208245
26x20x20	26	20	20	42,5	42,5	45,5	136	8595042208252
26x20x26	26	20	26	42,5	42,5	45,5	150	8595042204766
26x26x16	26	26	16	45,5	45,5	45,5	151	8595042204827
26x26x20	26	26	20	45,5	45,5	45,5	158	8595042204742
26x32x20	26	32	20	48,5	48,5	50,5	174	8595042215137
26x32x26	26	32	26	48,5	48,5	50,5	205	8595042215144
32x16x26	32	16	26	45,5	40,5	48,5	157	8595042212549
32x16x32	32	16	32	45,5	45,5	48,5	190	8595042212525
32x20x20	32	20	20	47,5	42,5	48,5	151	8595042212570
32x20x26	32	20	26	47,5	42,5	48,5	169	8595042212532
32x20x32	32	20	32	47,5	47,5	48,5	188	8595042212556
32x26x26	32	26	26	50,5	45,5	48,5	210	8595042212563
32x26x32	32	26	32	50,5	50,5	48,5	212	8595042182675

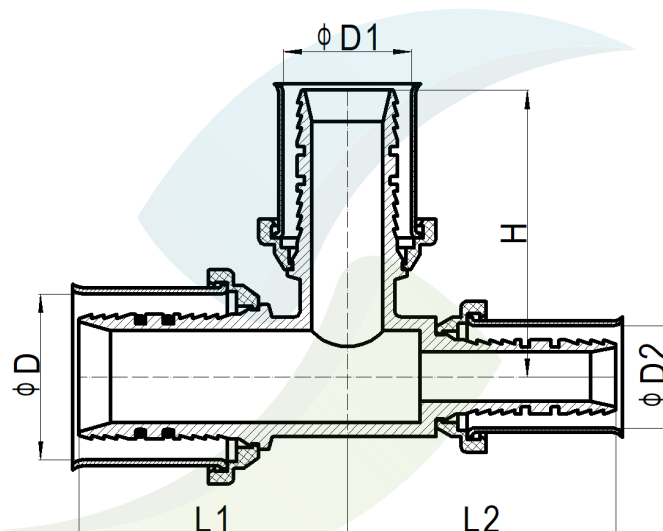

záruka 2 roky
Intrastat 74122000